



The **First Name** in Turf Renovation™

# MATAWAY® OVERSEEDERS & DETHATCHERS

**There's simply nothing like these ultra-versatile machines on the market.**

The Mataway Overseeder delivers seed straight to the curve-shaped discs, placing it directly into the soil slits for unmatched seed-to-soil contact. The seed flow rate is easily controlled right from the operator's station, and the flow stops automatically when the reel is raised for maximum control and precise operation.

The Mataway Dethatcher is built for heavy-duty turf renovation and dethatching. This self-propelled money maker offers user-friendly features like cutting depth control right from the operator's station. Its five different reel types are easily interchangeable. For optimal efficiency, a 19-inch working width allows you to cover up to 18,700 square feet per hour.



## SPECIFICATIONS

### POWER

Engine Model . . . . . 4-cycle Honda® GX390; recoil start; on/off switch; low-oil alert  
Displacement . . . . . 23.7 cu in. (389 cc)  
Fuel Capacity . . . . . 1.6 gal. (6.1 L)  
Oil Capacity . . . . . 1.16 qt (1.1 L)

### UNIT

Clutch . . . . . Spring-loaded belt tightener  
Drive . . . . . 4L-section V-belt to front wheels by gear box and sealed roller chain; triple 3V-section V-belts engine to reel  
Lubrication . . . . . Oil splash in gear case, pressure grease fitting elsewhere  
Cutting Depth . . . . . Adjustable for any desired depth to 1.5 in. (38 mm)  
Seeding/Slicing Width . . . . . 19 in. (483 mm)  
Tires: Front . . . . . (2) 10.4 x 4.10-4, 2-ply pneumatic, knob tread  
Tires: Rear . . . . . (2) 10.25 x 4.10-4, 2-ply pneumatic, sawtooth tread  
Productivity: Single Pass . . . . . 80%; 18700 sq ft/hr  
Productivity: Double Pass . . . . . 80%; 9400 sq ft/hr


### OPTIONAL VERTICAL SLICER/DETHATCHER REELS

Flail Blade Type . . . . . 1/8 in. (3 mm) at 1 in. (25 mm) spacing  
Fixed Blade Type . . . . . 1/32 in. (1 mm) at 1/2 in. (13 mm) spacing;  
1/32 in. (1 mm) at 1 in. (25 mm) spacing;  
1/16 in. (2 mm) at 1 in. (25 mm) spacing;  
1/16 in. (2 mm) at 1 1/2 in. (38 mm) spacing

### DIMENSIONS

Weight: Wet-Dethatcher . . . . . 376 lb (171 kg) w/o reel  
Weight: Wet-Overseeder . . . . . 453 lb (205 kg) w/o reel  
Width . . . . . 35.5 in. (902 mm)  
Length . . . . . 50 in. (1,270 mm)  
Height . . . . . 44 in. (1,118 mm)


*Specifications subject to change without notice.*

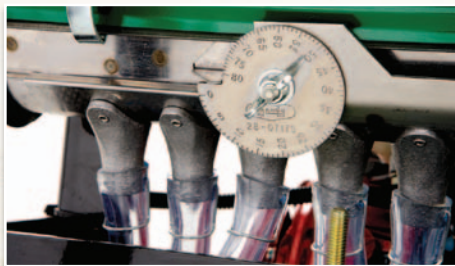

The seed depth guide allows for seeding at variable rates and for different grass varieties and applications.



Durable cutting blades can be adjusted down to a depth of 1/2".

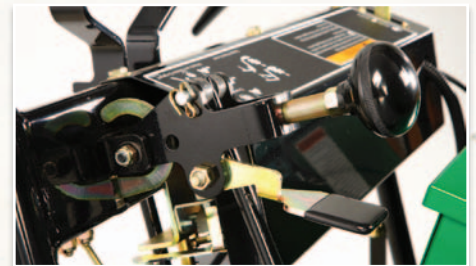

Adjust the engine throttle and set the cutting depth right from the operator's station.

# WWW.RYANTURF.COM